



BIO OIL

An oil featuring highest biogenic content for industrial on-line processing on conventional UV coating lines

EASY PROCESSING

- + Suitable for short coating lines and contract finishers
- + Can be applied on all common UV lines
- + No primer necessary
- + Immediately stackable as no overnight drying is required
- + Ready-to-use


TECHNICAL PROPERTIES

- + Excellent filling properties
- + Good wetting properties
- + Complies with the extremely strict criteria of the Austrian Standard C 2380 (renewable carbon content of the binder >90 %)
- + Good results regarding adhesion, coin test and Hamberger Planer
- + Almost no difference in gloss between the different measuring angles:
3-5 units @ 60°; 6-10 units @ 85°
- + Good chemical resistance against common domestic substances

ADDED VALUE

- + No initial care after installation required
- + Very good gloss retention
- + Pleasant to the touch
- + Easy-to-clean

Option 1

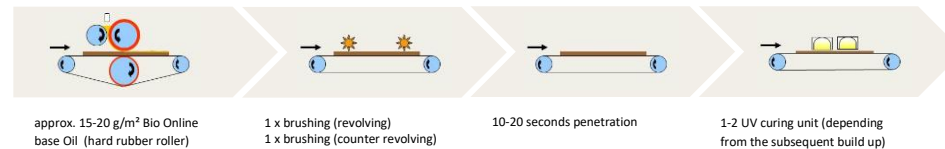

5-7 g/m² Bio Online Top Oil

3-4 x UV curing unit s (full cure)

Option 2

